



RA8 24D

Features

- Torque 8 Nm
- For regulate dampers up to approx. 2.0 m²
- Power supply
24 Vac/dc for RA8 24D
220 Vac for RA8 220D
- Control signal on/off or 3-point
- Running time 30 seconds
- Position indicator
- Direction of rotation changeable via wiring diagram
- Manual override by push button

Auxiliary switches on request

Running time 8 seconds also on request


Technical data

Torque	8 Nm
Control signal	on/off or 3-point
Power supply	24 Vac or dc +/-10% for RA8 24D 220 Vac +/-10% for RA8 220D
Frequency	50/60 Hz
Running time	30 seconds
Power consumptions	
- Operating	3.9 W (24V), 4.8W (220V)
- At the end stops	0.4W (24V), 1.2W (220V)
Rotation angle	0-90°
Limit angle	5 to 85° (5° increment)
Life cycle	60.000 cycles
Noise level	45dB(A)
Protection class	□
Protection	IP 44
Ambient temperature	-20 to +50°C
Ambient humidity	5 to 95% rH
Storage	-40 to +70°C
Approval	CE certificate
Weight	1300 g

Ordering

Type no.	Description
RA8 24D	Damper actuator, 8 Nm, 24 Vac/dc, with on/off or 3-point control signal
RA8 220D	Damper actuator, 8 Nm, 220 Vac, with on/off or 3-point control signal

Dimensions in mm

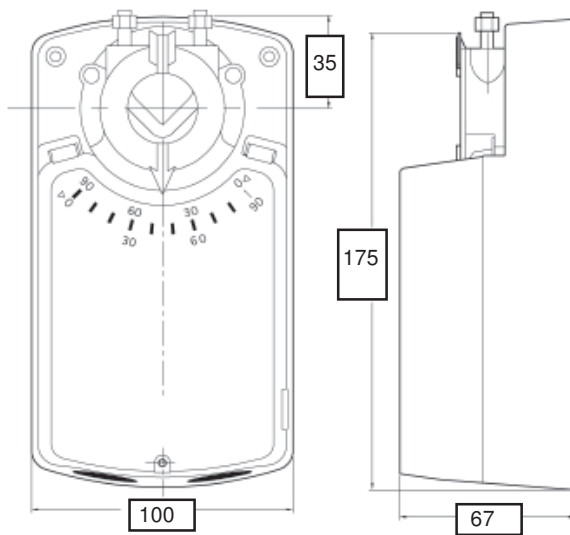


Max size for round shaft is 20 mm in diameter.

Max size for square shaft is 16x16 mm.

Anti-rotation bracket provided for stability.

Wiring

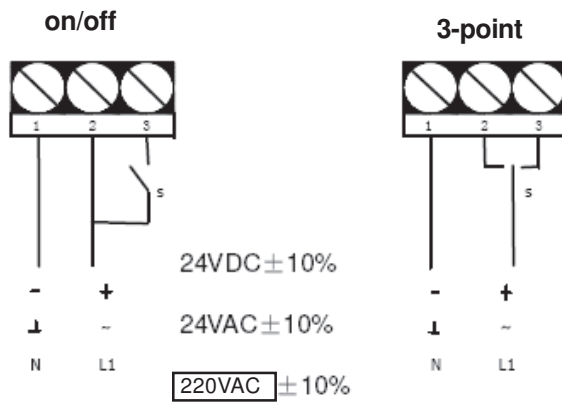

We reserve the right to make changes in our products without any notice which may effect the accuracy of the information contained in this leaflet.